


ECT

Product Datasheet 2.19



P.V.C. Eco Trim

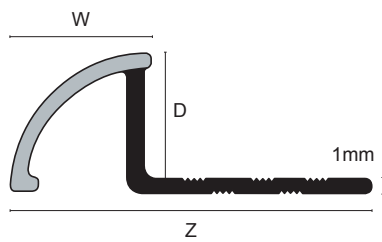

Product Description

A round edge recycled PVC edging trim - This profile features a small quadrant face which is good for 3 dimensional alignment, overhang lips to better butt against the cushion edge of the ceramic tile and a second upright support to close the face and make it suitable for floor tile use.

Technical Details

Recycled UPVC is particularly suitable for a wide range of application due to its excellent chemical resistance, however note the following:

Not recommended for use above 60°C
resistant to most oils, alcohols, petrol and fats.
It is unsuitable for use in contact with aromatic and chlorinated hydrocarbons, ketones, nitrocompounds, esters and cyclic ethers with cause some swelling.

Property	Test Method	Result
Viscat Softening Point	ISO 306	93°C
Tensile Modulus	ASTM D638	1.19 GPa
Yield Stress	ASTM D638	44.8 MPa
Yield Strain	ASTM D638	4.42%
Elongation at failure	ASTM D638	131%
Flexural Modulus	ISO 178	2.38 GPa
Tensile Impact Strength	ISO 8256	413 kJ/m ²

Dimensions

Available in 6mm, 9mm and 12mm internal depths and 2.5m lengths.

Maintenance

Genesis ECT requires no special maintenance. Cleaned periodically using a neutral detergent to maintain the appearance.

Regular cleaning aids the longevity of the profile and ensures there is no corrosion that could affect safety.

Installation

1. Check the exact position of the trim required relative to the tiles to be laid.
2. Bed trim into normal tile adhesive ensuring adhesive penetrates the holes in the flange. There are 5mm holes available for mechanical fixing if additional securing is needed.
3. Spread the adhesive over the flange and firmly bed in tiles butting against the profile.
4. A grout gap is not necessary, however, if a gap is visible ensure grout is compressed firmly into the gap.

+44 (0)1642 713000 info@genesis-gs.com
www.genesis-gs.com

 **Genesis**
For the Perfect Finish